


### **TECHNICAL SHEET**

28/11/2025

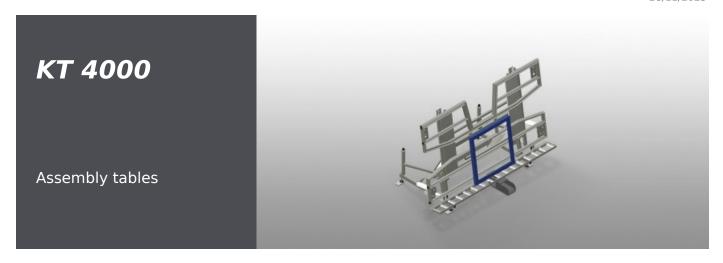


Assembly table for vertical and horizontal assembly. Stable steel construction. Important when switching from vertical to horizontal transportation and vice versa. Ideal for vertical and horizontal assembly. Pneumatic tilting. Table supporting surface with plastic slide bars. Roller support can be lowered pneumatically. 4-fold compressed air supply.

# (someco)


### **TECHNICAL SHEET**

28/11/2025




### Supporting surfaces

Supporting surfaces with plastic slide bars




### Roller support

Roller conveyor can be lowered pneumatically to allow unhindered working in horizontal position; in vertical position, trouble-free onward transport is possible




### Foot switch

Control via foot valve. Pneumatic horizontal/vertical tilting




## 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools



### Profile protectors for support rollers (Optional)

Profile protectors for support rollers 200 mm (Alum./16 x and Alum./21 x). Roller conveyor with protective tubing over the rollers to protect the window element during infeed and outfeed



## Pull-out profile support (Optional)

Pull-out table support at top for KT/KTH 3000 and KT/KTH 4000.The table support can be pulled out 500 mm at the top for high frames

Voilàp S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) Tel 059 895411 Fax: 059 859404 P.IVA e C.F. 02057270361 info@somecopvc.com www.somecopvc.com

The right to make technical alterations is reserved.

# (someco)

## **TECHNICAL SHEET**

28/11/2025



Brush strip (Optional)

Supporting surfaces with brush strip




Felt strip (Optional)

Supporting surfaces with felt strip




Rubber strips (Optional)

Supporting surfaces with rubber-knob profile



**Mobility unit (Optional)** 

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake



Rails (Optional)

Rails, 2.0 m, left and right







### KT 4000 / ASSEMBLY TABLES

DIMENSION AND WEIGHT	
Length (mm)	4.000
Width (mm)	1.820
Vertical height (mm)	1.900
Roller conveyor width (mm)	200
Weight (kg)	380

SUPPORTING SURFACE	
Pneumatic height adjustment (mm)	500
Pneumatic tilting	•
Extendable table support	0
Table brush strip supporting surface	0
Table felt profile strip supporting surface	0
Table rubber knob profile	0
Profile protectors for support rollers	0
Load capacity (kg)	200

CHARACTERISTICS	
4-fold compressed air supply	•
Mobility unit	0
Rail 2,0 m left and right	0
Operating air pressure (bar)	7
Air consumption approx. (I/min)	35

Included ● Available ○