


## **KT 4000**

Assembly tables




Assembly table for vertical and horizontal assembly. Stable steel construction. Important when switching from vertical to horizontal transportation and vice versa. Ideal for vertical and horizontal assembly. Pneumatic tilting. Table supporting surface with plastic slide bars. Roller support can be lowered pneumatically. 4-fold compressed air supply.

**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY


Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
[info@somecopvc.com](mailto:info@somecopvc.com)  
[www.somecopvc.com](http://www.somecopvc.com)

The right to make technical alterations is reserved.

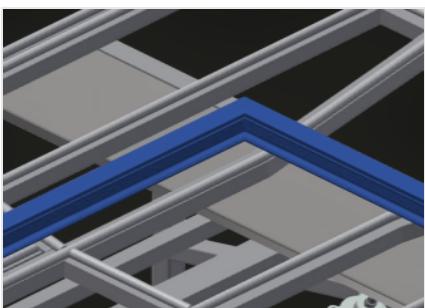


### Supporting surfaces

Supporting surfaces with plastic slide bars

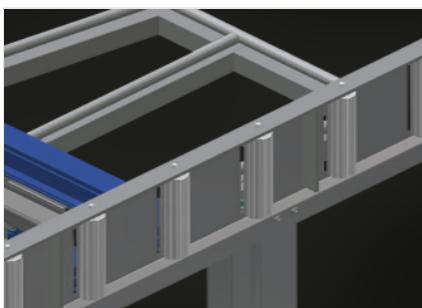


### Roller support

Roller conveyor can be lowered pneumatically to allow unhindered working in horizontal position; in vertical position, trouble-free onward transport is possible

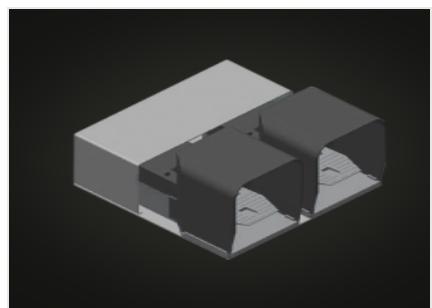


### Foot switch

Control via foot valve. Pneumatic horizontal/vertical tilting

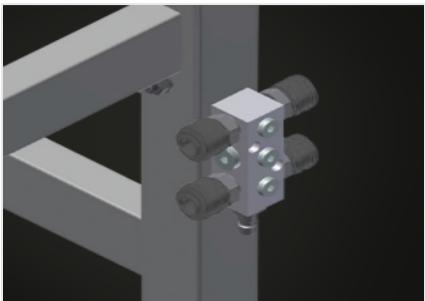


### 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools

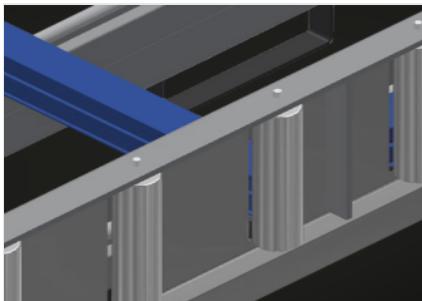

### Profile protectors for support rollers (Optional)

Profile protectors for support rollers 200 mm (Alum./16 x and Alum./21 x). Roller conveyor with protective tubing over the rollers to protect the window element during infeed and outfeed

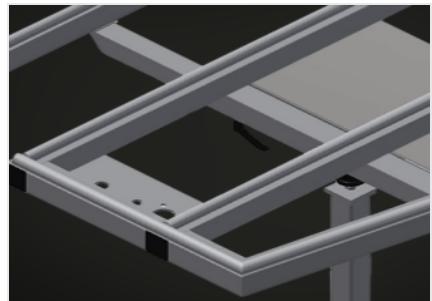

### Pull-out profile support (Optional)

Pull-out table support at top for KT/KTH 3000 and KT/KTH 4000. The table support can be pulled out 500 mm at the top for high frames



### Brush strip (Optional)

Supporting surfaces with brush strip




### Felt strip (Optional)

Supporting surfaces with felt strip



### Rubber strips (Optional)


Supporting surfaces with rubber-knob profile

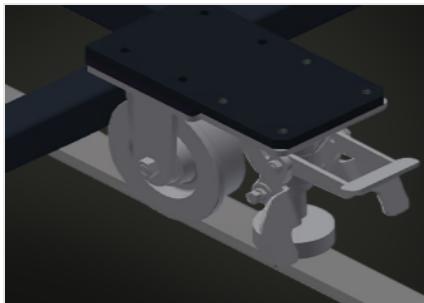

### Mobility unit (Optional)

Mobility unit for KT/KTH/MS/VE.

Mobility unit with flanged rollers and fixing brake

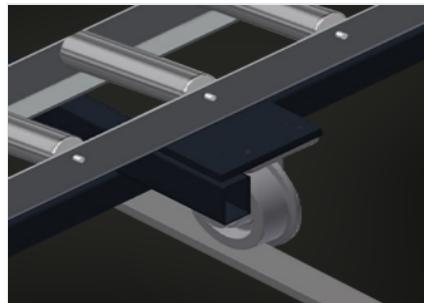

### Rails (Optional)

Rails, 2.0 m, left and right



**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.

## KT 4000 / ASSEMBLY TABLES

## DIMENSION AND WEIGHT

Length (mm)	4.000
Width (mm)	1.820
Vertical height (mm)	1.900
Roller conveyor width (mm)	200
Weight (kg)	380

## SUPPORTING SURFACE

Pneumatic height adjustment (mm)	500
Pneumatic tilting	●
Extendable table support	○
Table brush strip supporting surface	○
Table felt profile strip supporting surface	○
Table rubber knob profile	○
Profile protectors for support rollers	○
Load capacity (kg)	200

## CHARACTERISTICS

4-fold compressed air supply	●
Mobility unit	○
Rail 2,0 m left and right	○
Operating air pressure (bar)	7
Air consumption approx. (l/min)	35

Included ● Available ○

Voiàp S.p.A.  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.