


# **TECHNICAL SHEET**

28/11/2025

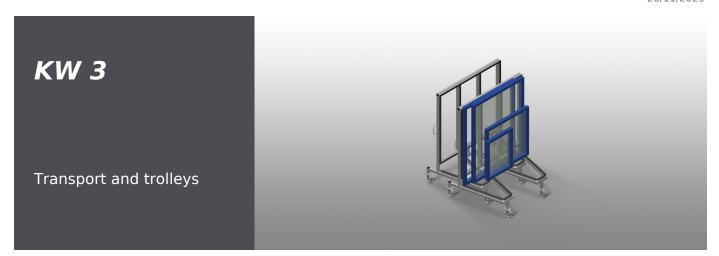

Commissioning trolley for in-house transportation of window elements. Stable steel construction. For in-house transportation. Profile supports with rubber surface. Can be nested when not loaded – a space-saving feature. Four swivel castors, two of which with locking stop.

1




## **TECHNICAL SHEET**

28/11/2025




#### **Casters**

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



# **Supports with rubber strip**

Supporting surfaces equipped with rubber strips to protect profiles from damage



# Transport handles

Transport handle on both sides for mobility



28/11/2025



### KW 3 / TRANSPORT AND TROLLEYS

DIMENSION AND WEIGHT	
Length (mm)	1.600
Width (mm)	1.130
Height (mm)	1.960
Weight (kg)	90

STORAGE CAPACITY	
Load capacity (kg)	400

•
4
2
125

Included • Available O