


TECHNICAL SHEET

28/11/2025

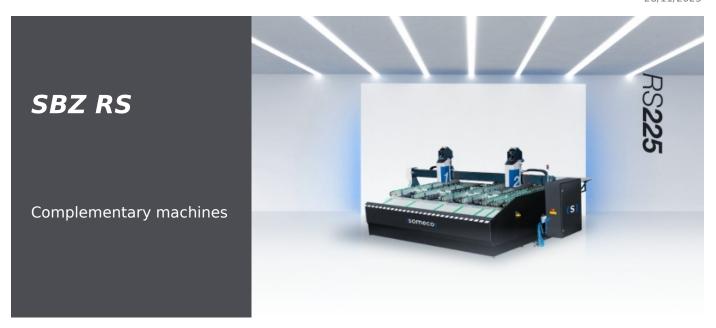

Automatic workbench for the automated screwing. Screwing operation process done simultaneously by two separate fully automatic screwing axis-controlled units. All machine axes are moved by hardened steel ball screw and rack-pinion gear system that provides accuracy and durability. The precision of positioning with 0,1 mm accuracy by high-speed servo on the holder axis. The machine is fully compatible with Processing center in automatic operation.

1







SBZ RS / COMPLEMENTARY MACHINES

2
6 ÷ 8
110
6,8
•

WORK AREA	
Minimum profile height (mm)	30
Maximum profile height (mm)	130
Maximum width of the profile (mm)	130

LOADING BENCH	
Minimum workpiece length (mm)	400
Maximum workpiece length (mm)	4.500
Maximum number workpiece loadable	8

DIMENSION AND WEIGHT	
Height (mm)	2.850
Width (mm)	4.540
Length (mm)	5.695
Weight (kg)	1.820

COMMAND FEATURES	
Industrial PC panel	•
Microsoft® Windows® Embedded	•
15" touchscreen display	•

Included ● Available ○

Voilàp S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) ITALY

Tel 059 895411 Fax: 059 859404 P.IVA e C.F. 02057270361 info@somecopvc.com www.somecopvc.com The right to make technical alterations is reserved.