


TECHNICAL SHEET

28/11/2025

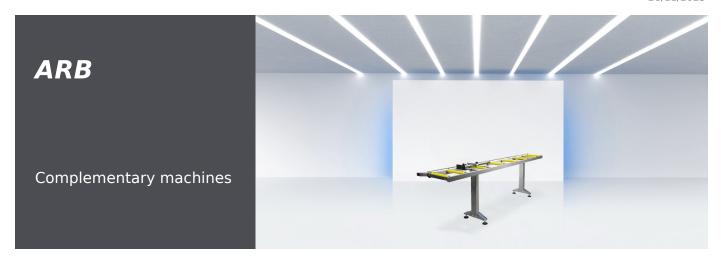

Tubular steel construction with adjustable mounting feet and PVC covered steel rolls. In the version with rolls size 240 mm, roller conveyor length is 3.500 mm.

1

(someco)


TECHNICAL SHEET

28/11/2025



Stop

Carriage running on ball bushing actuated by mechanically controlled kinematics, which allows, referring to the centre of the blade, the realization of the length of the workpiece to be cut.



Side view

Through special steel bracket, the mechanical connection to the cutting machine is made precisely and rigidly.



Roller

PVC-coated steel rollers of 240 mm that allow the profile to slide effectively, preventing surface damage.



TECHNICAL SHEET

28/11/2025

ARB / COMPLEMENTARY MACHINES

CHARACTERISTICS

Loading capacity (kg) 100

Included • Available \circ