

ARB

Complementary machines



Tubular steel construction with adjustable mounting feet and PVC covered steel rolls. In the version with rolls size 240 mm, roller conveyor length is 3.500 mm.

Voiàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.




Stop

Carriage running on ball bushing actuated by mechanically controlled kinematics, which allows, referring to the centre of the blade, the realization of the length of the workpiece to be cut.



Side view

Through special steel bracket, the mechanical connection to the cutting machine is made precisely and rigidly.

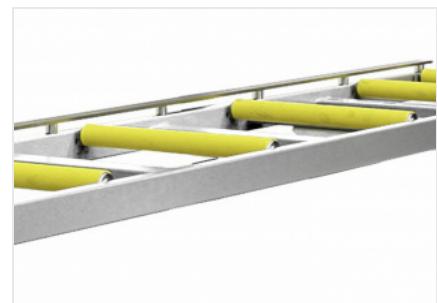

Roller

PVC-coated steel rollers of 240 mm that allow the profile to slide effectively, preventing surface damage.

ARB / COMPLEMENTARY MACHINES

CHARACTERISTICS

Loading capacity (kg)	100
-----------------------	-----

Included ● Available ○

Voiàp S.p.A.
Via Archimede, 10
41019 - Limidi di Soliera (MO)
ITALY

Tel 059 895411
Fax: 059 859404
P.IVA e C.F. 02057270361
info@somecopvc.com
www.somecopvc.com

The right to make technical alterations is reserved.