


TECHNICAL SHEET

26/07/2025



Inspection and glazing units

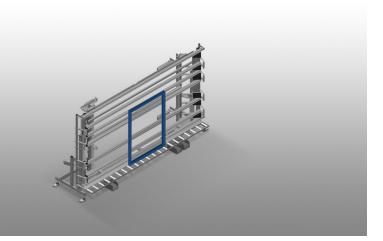


Inspection and glazing unit for glazing and final inspection in individual and serial assembly line production. Quick and precise assembly of windows, doors and elements. Stable steel construction. Precision ensured through parallel clamping bar pressing technique. Height continuously adjustable. Easy operation by means of foot switch. Two pressing bars which fold down and can be moved pneumatically and 4-fold compressed air supply.

(someco)


TECHNICAL SHEET

26/07/2025




Back support

Rear back support with plastic slide bars




Roller support

Lower roller conveyor with support roller, L = 200 mm



Foot switch

All functions are controlled via foot



Pressing bar

Simultaneous folding and moving of the pressing bars ensure a minimum of time is required for opening and closing the press. Allows free passthrough of the window



Left lead-in rollers (Optional)

Protective rollers for beginning or end of roller conveyor




Right lead-in rollers (Optional)

Protective rollers for beginning or end of roller conveyor

Voilàp S.p.A. Via Archimede, 10 41019 - Limidi di Soliera (MO) Tel 059 895411 Fax: 059 859404 P.IVA e C.F. 02057270361 info@somecopvc.com www.somecopvc.com The right to make technical alterations is reserved.






Tilt adjustment of 0 $^{\circ}$ - 8 $^{\circ}$ (Optional)

Pneumatic tilt adjustment of 0° - 8°



Profile protectors (Optional)

Profile protectors for support rollers 200 mm. Support rollers covered with protective tubing



Mobility unit (Optional)

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake



Rails (Optional)

Rails, 2.0 m, left and right







VE 3000 / INSPECTION AND GLAZING UNITS

DIMENSION AND WEIGHT	
Length (mm)	4.410
Width (mm)	1.180
Height (mm)	2.600
Lower roller conveyor width (mm)	200
Weight (kg)	470

WORKPIECE LOCKING	
Maximum clamping width (mm)	3.000
Minimum clamping width (mm)	400
Clamping bar height (mm)	2.300
Clamping bar width (mm)	120

CHARACTERISTICS	
Load capacity (kg)	200
Adjustable height (mm)	500
Height continuously adjustable	•
Pneumatic tilt adjustment of 0° – 8°	0
4-fold compressed air supply	•
Lead-in rollers right, complete L= 2052 mm	0
Lead-in rollers left, complete L= 2052 mm	0
Profile protectors for L= 200 mm	0
Mobility unit	0
Rail 2,0 m left and right	0
Operating air pressure (bar)	7
Air consumption approx. (I/min)	35

Included • Available O