


**VE 4000**

Inspection and glazing  
units




Inspection and glazing unit for glazing and final inspection in individual and serial assembly line production. Quick and precise assembly of windows, doors and elements. Stable steel construction. Precision ensured through parallel clamping bar pressing technique. Height continuously adjustable. Easy operation by means of foot switch. Two pressing bars which fold down and can be moved pneumatically and 4-fold compressed air supply.

**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY


Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is  
reserved.

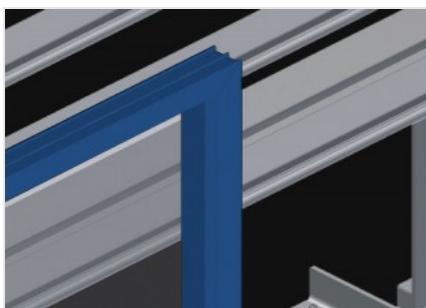


### Back support

Rear back support with plastic slide bars

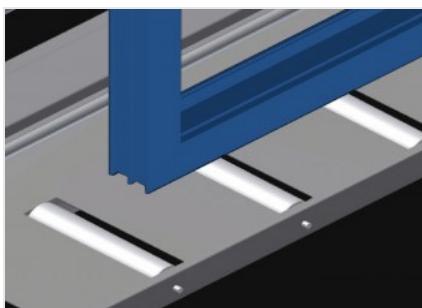


### Roller support

Lower roller conveyor with support roller, L = 200 mm

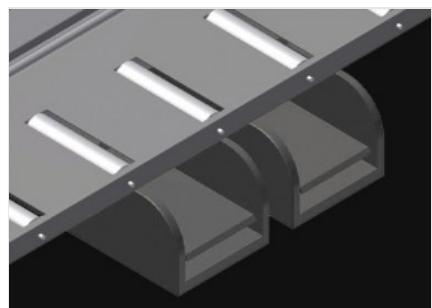

### Foot switch

All functions are controlled via foot valves

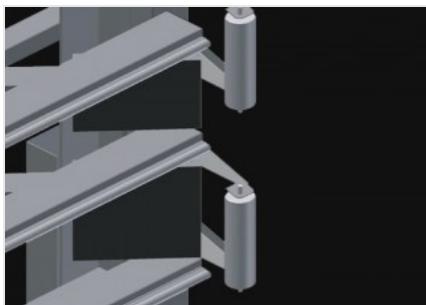

### Pressing bar

Simultaneous folding and moving of the pressing bars ensure a minimum of time is required for opening and closing the press. Allows free pass-through of the window




### Left lead-in rollers (Optional)

Protective rollers for beginning or end of roller conveyor




### Right lead-in rollers (Optional)

Protective rollers for beginning or end of roller conveyor

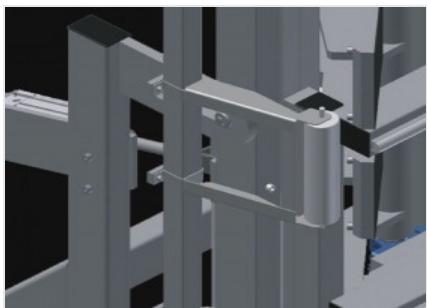


### Tilt adjustment of 0° - 8° (Optional)

Pneumatic tilt adjustment of 0° - 8°

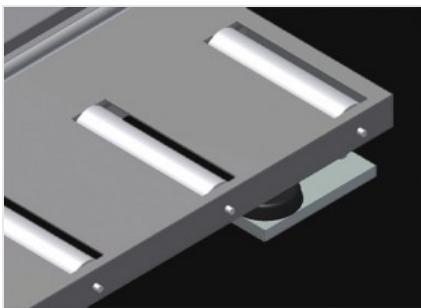


### Profile protectors (Optional)

Profile protectors for support rollers 200 mm. Support rollers covered with protective tubing

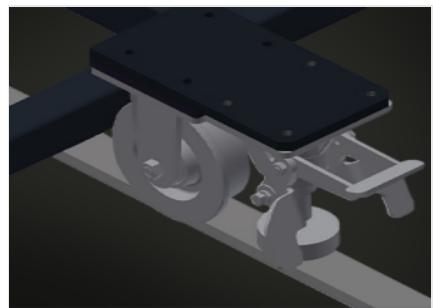

### Mobility unit (Optional)

Mobility unit for KT/KTH/MS/VE.  
Mobility unit with flanged rollers and fixing brake

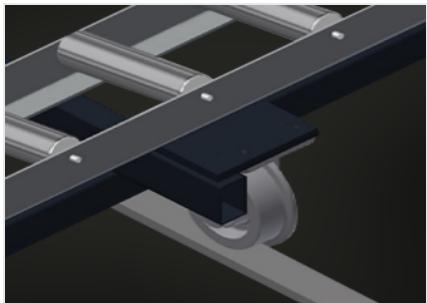

### Rails (Optional)

Rails, 2.0 m, left and right

**VE 4000 / INSPECTION AND GLAZING UNITS****DIMENSION AND WEIGHT**

Length (mm)	5.440
Width (mm)	1.180
Height (mm)	2.600
Lower roller conveyor width (mm)	200
Weight (kg)	580

**WORKPIECE LOCKING**

Maximum clamping width (mm)	4.000
Minimum clamping width (mm)	390
Clamping bar height (mm)	2.300
Clamping bar width (mm)	200

**CHARACTERISTICS**

Load capacity (kg)	200
Adjustable height (mm)	500
Height continuously adjustable	●
Pneumatic tilt adjustment of 0° – 8°	○
4-fold compressed air supply	●
Lead-in rollers right, complete L= 2052 mm	○
Lead-in rollers left, complete L= 2052 mm	○
Profile protectors for L= 200 mm	○
Mobility unit	○
Rail 2,0 m left and right	○
Operating air pressure (bar)	7
Air consumption approx. (l/min)	35

Included ● Available ○

**Voiàp S.p.A.**  
Via Archimede, 10  
41019 - Limidi di Soliera (MO)  
ITALY

Tel 059 895411  
Fax: 059 859404  
P.IVA e C.F. 02057270361  
info@somecopvc.com  
www.somecopvc.com

The right to make technical alterations is reserved.