


TECHNICAL SHEET

13/12/2025




Trolley for transporting and providing a sorted selection of cut-to-length reinforcement profiles. Stable steel construction. Vertical storage and transportation of steel profiles. Compact outside dimensions. Well-organised arrangement of fixed-length profiles. Four swivel castors, two of which with locking stop.

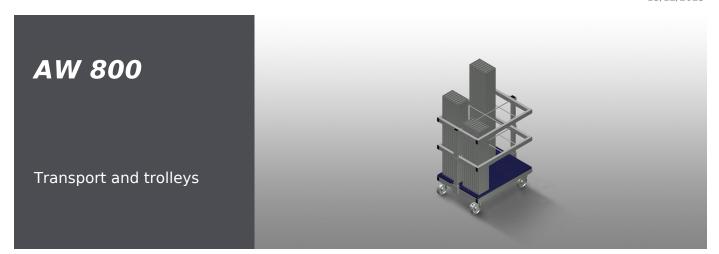


TECHNICAL SHEET

13/12/2025



Compartments

Six compartments, compartment size 190 x 265 mm



Grid frame

Two grid frames with height adjustment



Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling







AW 800 / TRANSPORT AND TROLLEYS

| DIMENSION AND WEIGHT | |
|----------------------|-----|
| Length (mm) | 800 |
| Width (mm) | 600 |
| Height (mm) | 960 |
| Weight (kg) | 35 |
| | |

| STORAGE CAPACITY | |
|--------------------|-----|
| Compartments | 6 |
| Load capacity (kg) | 400 |

| Swivel castors Swivel castors with locking stop Swivel castors diameter (mm) | CHARACTERISTICS | |
|--|----------------------------------|-----|
| | Swivel castors | 4 |
| Swivel castors diameter (mm) | Swivel castors with locking stop | 2 |
| | Swivel castors diameter (mm) | 125 |

Included • Available O