


TECHNICAL SHEET

09/09/2025

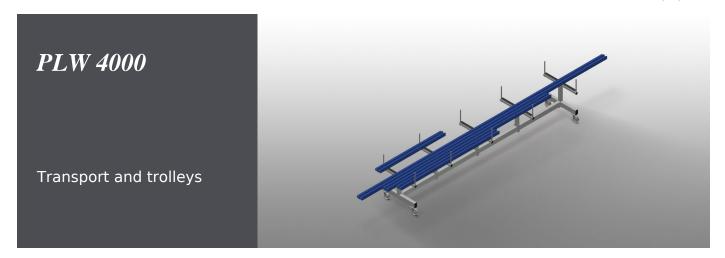

Trolley for storage and transportation of profiles. Stable steel construction. Trolley for transportation and storage of profile bars before and after cutting. Well-organised storage provides quick access. Ideal transportation option for curtain wall construction. The trolley can also be used as a mobile intermediate storage area, for example, before moving onward to the double mitre saw or machining centre. Profile support arms can be adjusted. Profile supports with rubber surface. Four swivel castors, two of which with locking stop.

1




TECHNICAL SHEET

09/09/2025




Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling




Supporting surfaces

Supporting surfaces clad with rubber protect profiles from damage



Guards with plastic protector

Vertical guards with plastic protectors protect the profiles from damage and prevent them from slipping off



Profile support

Profile supports can be adjusted







PLW 4000 / TRANSPORT AND TROLLEYS

DIMENSION AND WEIGHT	
Length (mm)	4.000
Width (mm)	800
Height (mm)	900
Weight (kg)	100

STORAGE CAPACITY	
Width of the support arms (mm)	750
Height of the guards (mm)	270
Load capacity (kg)	600

CHARACTERISTICS	
Swivel castors	4
Swivel castors with locking stop	2
Swivel castors diameter (mm)	125

Included • Available \circ